


ISGW-BZ31

PLUG-IN GATEWAY

A compact plug-in gateway signaler that allows Access Control from anywhere with a functioning Wi-Fi signal.

DIMENSIONS

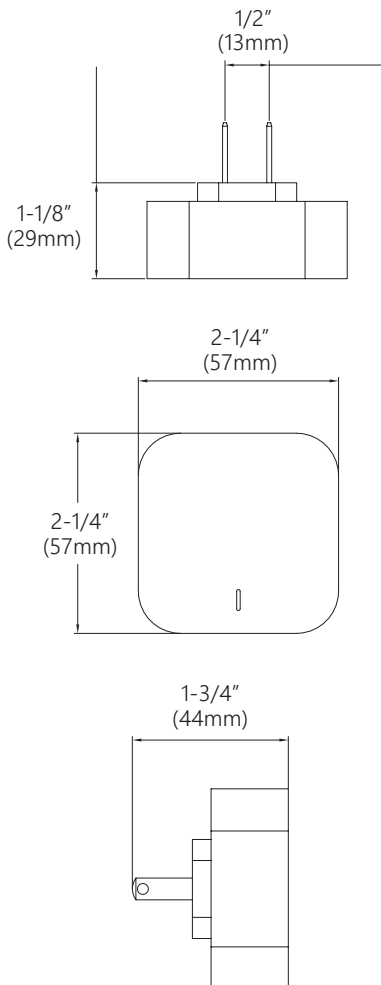

FEATURES

- The gateway can be plugged into any standard 110V outlet
- Supports several smart devices simultaneously; however, for optimal performance, it is recommended to connect no more than 2 smart devices at a time
- The gateway enables remote access via the INOX APP when connected to 4G, 5G, or the Internet
- Requires a 2.4 GHz network for connectivity
- Keep the gateway within 10 feet of the router and the lock device, with a maximum open range of **30 feet with a clear line of sight**. If obstacles (walls or furniture) are present, reduce the distance to 6 feet or less.

SPECIFICATIONS

Communication Protocol	BLU: Bluetooth Wi-Fi: Wireless Zigbee: Wireless Personal Area Network
Protocol Specs	BLU: 4.2, 802.11n Wi-Fi: 802.11bgn Zigbee: 3.0 IEEE 802.15.4
Wi-Fi LED (Red)	Blinking: Configuration mode Off: No network connection On: Connected to network
Pairing LED (Blue)	Blinking: Adding sub-device mode On: Gateway configured <i>Press and hold the button for 5 seconds until the red LED blinks, the gateway will enter the configuration mode.</i>
Power Input	110V~220V (110V US Outlet)
Operating Temperature	14°F to 122°F
Dimension	2.2" L x 2.2" W x 0.9" H

If configuring Inox Smart Lock/Gateway with a Wifi Network with a Security Barrier (such as a firewall), please contact INOX Smart Technical Support for Port Forwarding Information.