


Template for IST Tubular Smart Lock with SFK Plate in 4" CTC

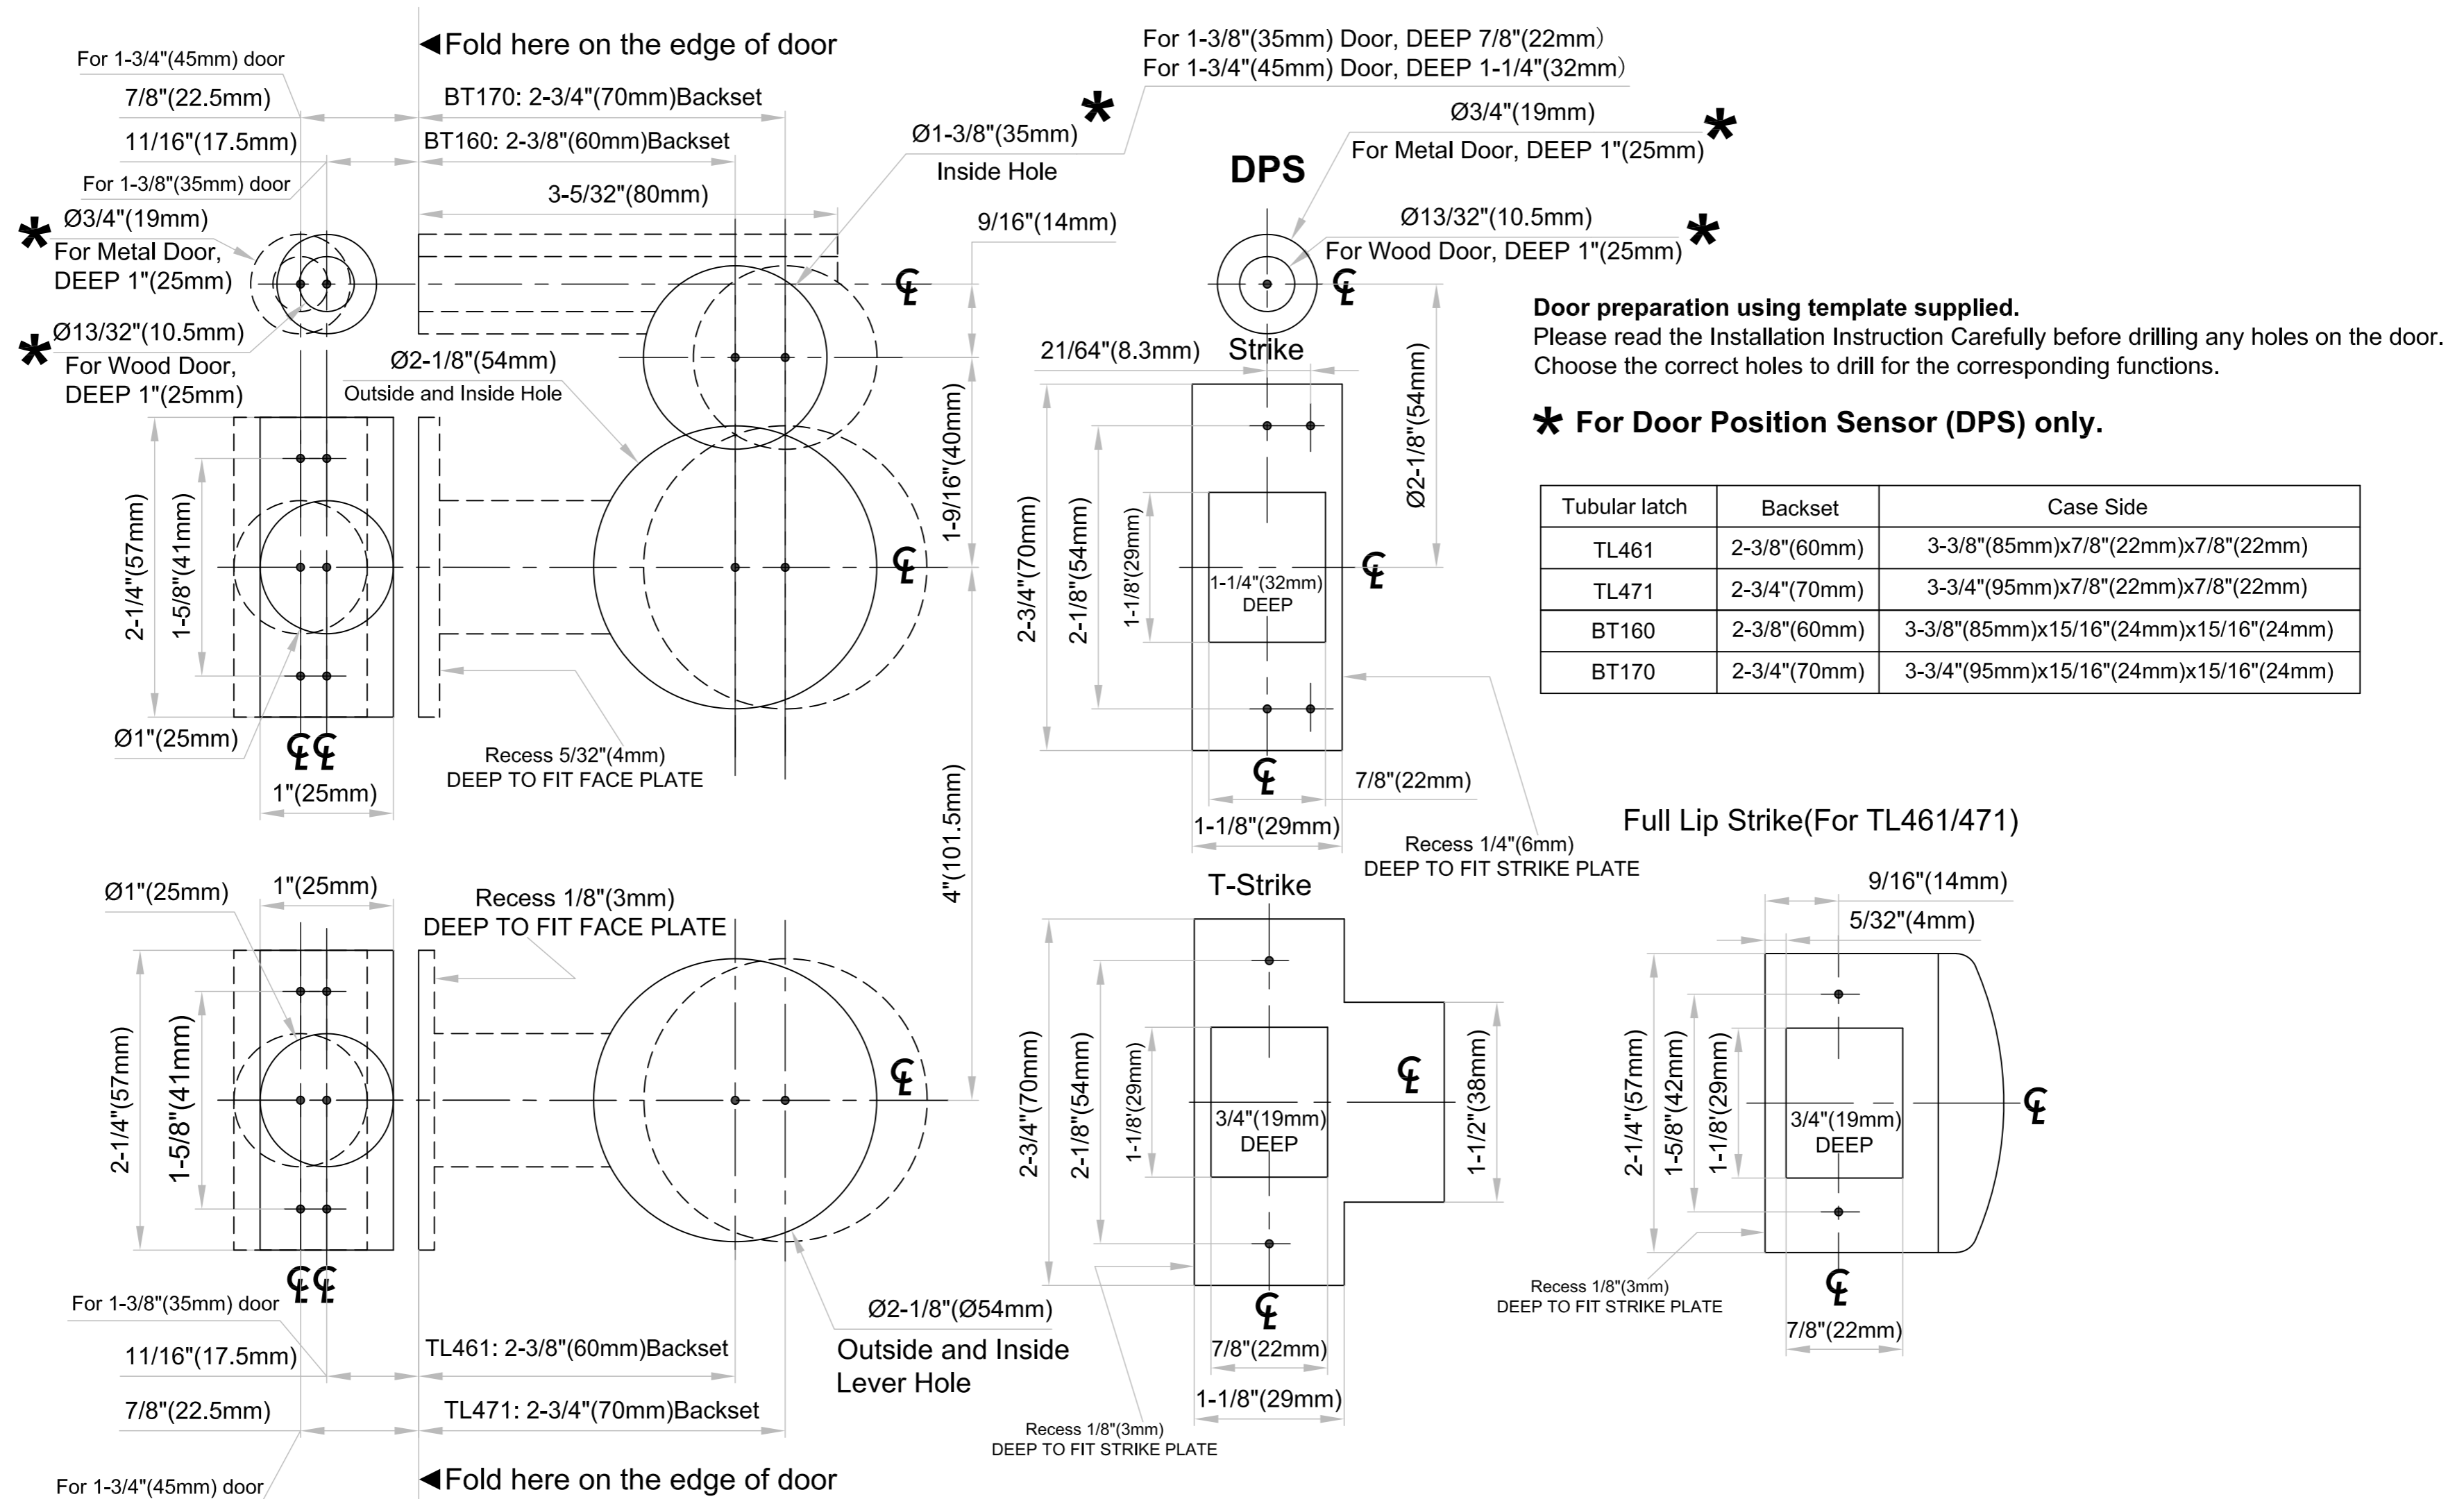

Door preparation using template supplied.
Please read the Installation Instruction Carefully before drilling any holes on the door.
Choose the correct holes to drill for the corresponding functions.

*** For Door Position Sensor (DPS) only.**

Tubular latch	Backset	Case Side
TL461	2-3/8"(60mm)	3-3/8"(85mm)x7/8"(22mm)x7/8"(22mm)
TL471	2-3/4"(70mm)	3-3/4"(95mm)x7/8"(22mm)x7/8"(22mm)
BT160	2-3/8"(60mm)	3-3/8"(85mm)x15/16"(24mm)x15/16"(24mm)
BT170	2-3/4"(70mm)	3-3/4"(95mm)x15/16"(24mm)x15/16"(24mm)

Dimensions do not provide allowances for door silencers, weather stripping, sound proofing or other additions to door or door frames.